


Highest Performance, Lowest Power Dual Mixers

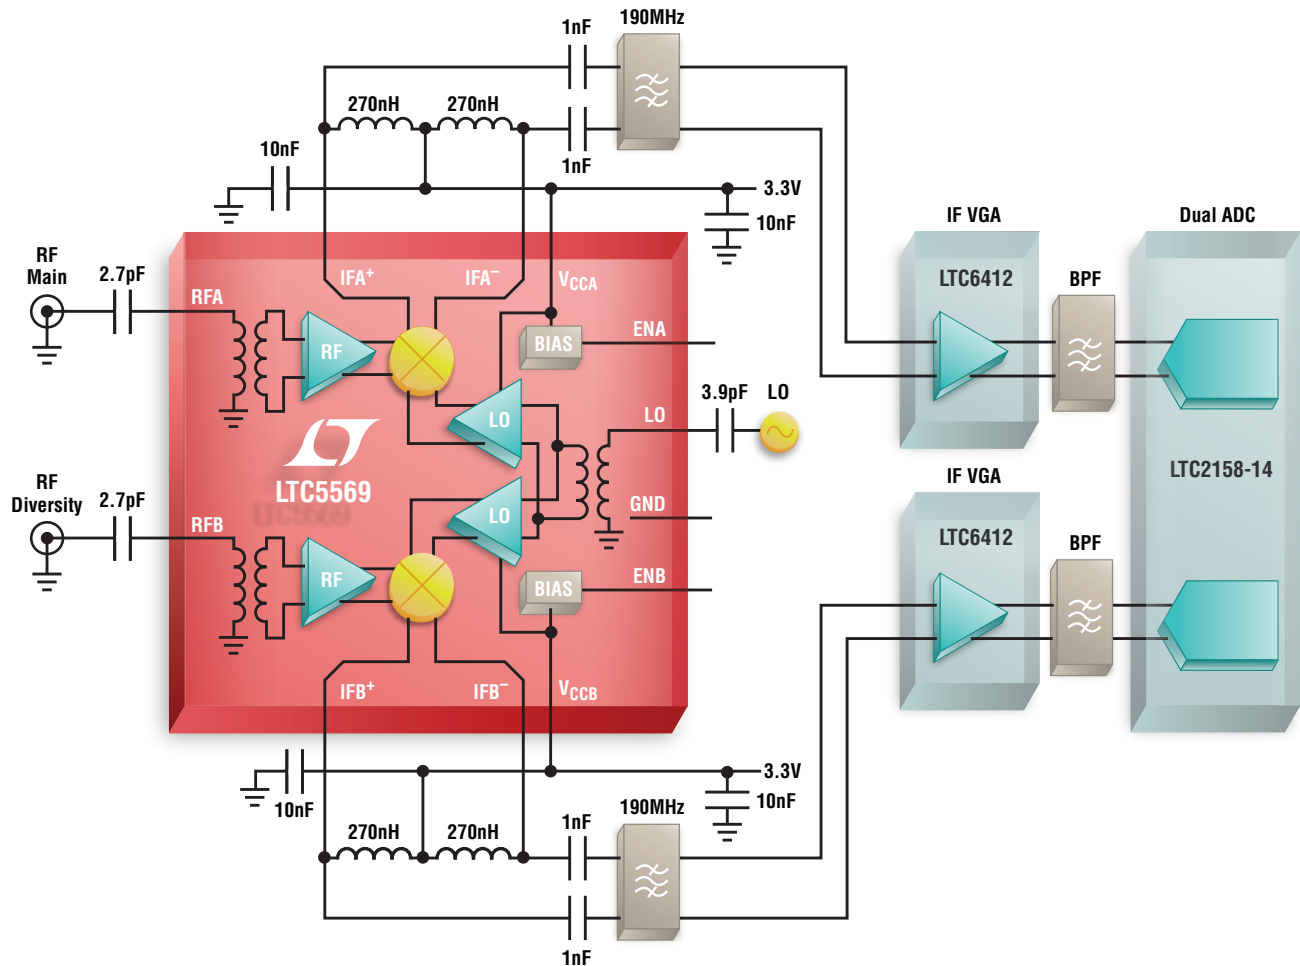

1.95GHz Low Power Diversity Receiver with 190MHz Bandpass IF Matching

Linear Technology Dual Mixer Family


	Frequency Range	IIP3	Gain	NF/5dBm Blocking	Power Supply
LTC5569	300MHz to 4GHz	26.8dBm	2dB	11.7/17.0dB	3.3V/182mA
LTC5590	600MHz to 1.7GHz	26.0dBm	8.7dB	9.7/15.5dB	3.3V/379mA
LTC5591	1.3GHz to 2.3GHz	26.2dBm	8.5dB	9.9/15.5dB	3.3V/382mA
LTC5592	1.6GHz to 2.7GHz	26.3dBm	8.3dB	9.8/16.4dB	3.3V/406mA
LTC5593	2.3GHz to 4.5GHz	26.0dBm	8.5dB	9.5/15.9dB	3.3V/397mA



LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

Compare...

Actual Application Circuit — Fewer External Components Saves Cost

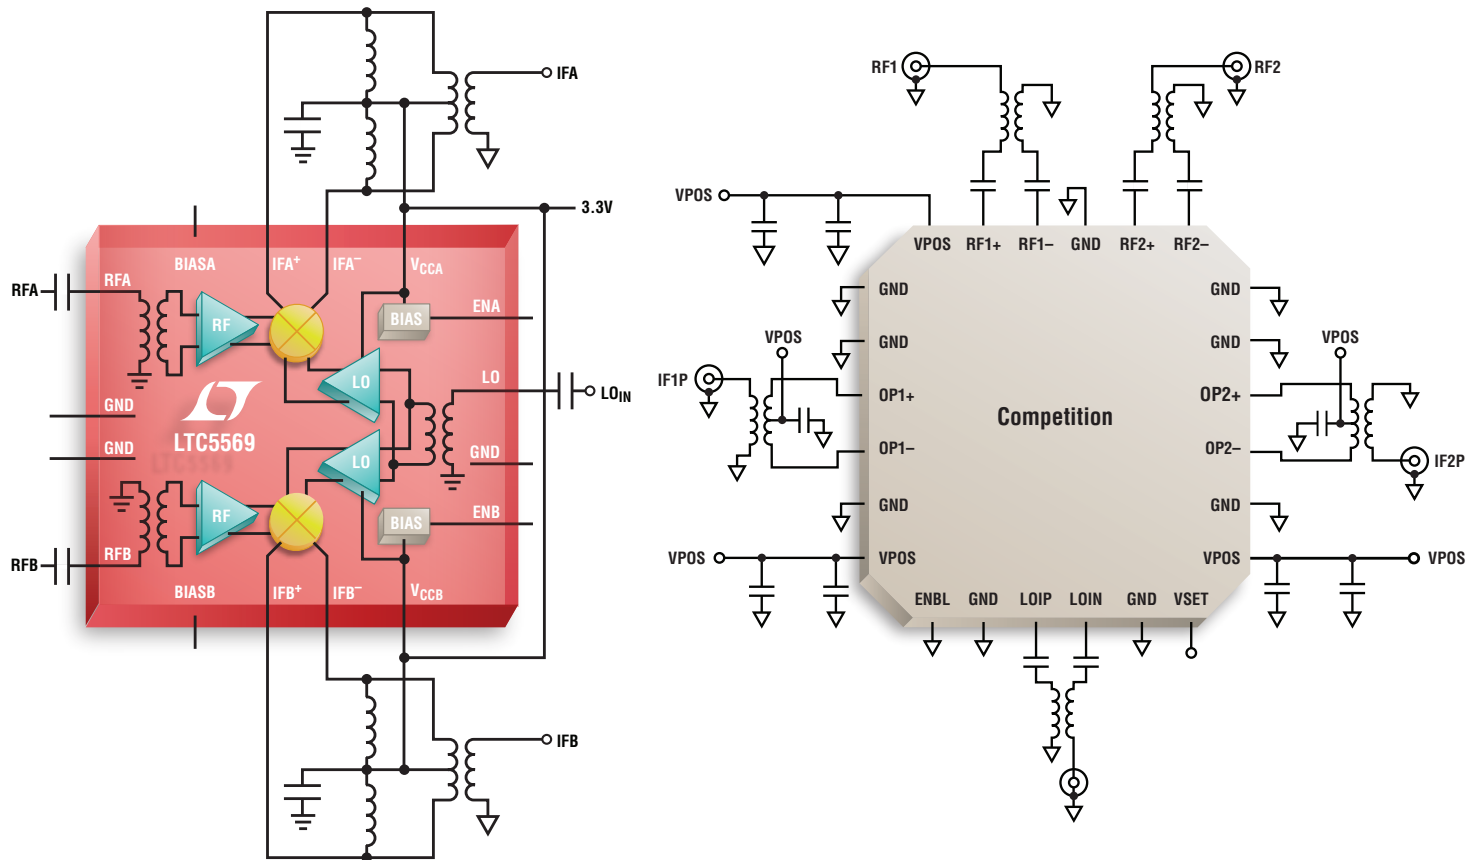

	LTC5569	Competition
IIP3	26.8dBm	28dBm
Gain	2dB	< 0dB
OIP3	28.8dBm	< 28dBm
NF	11.7dB	11.8dB
NF with 0dBm Blocker	14.5dB	22dB
Power Consumption	0.6W	1.1W